

TRENCH SECTION

CONSTRUCTION NOTES

1. ALL WORK SHALL BE IN ACCORDANCE WITH SPECIFICATION SECTION 02200 & 02223.
2. ALL BACKFILL WITHIN THE PIPE BASE AND PIPE ZONE SHALL BE IMPORTED SAND OR GRANULAR MATERIAL UNLESS NOTED OTHERWISE.
3. A.C.P., D.I.P., AND P.V.C. PIPE SHALL BE INSTALLED AS DETAILED IN SECTIONS 15702, 15056, AND 15064 RESPECTIVELY.
4. MARK PIPE PER SECTION 15151.
5. THICKNESS OF STREET ZONE PER PAVMENT PATCH DETAIL OF GOVERNING CITY

TRENCH SECTION & PIPE BEDDING DETAILS

REVISIONS		
NO.	DATE	APPROVED




**CITY OF SAN
JUAN CAPISTRANO**

APPROVED
[Signature]
WATER SERVICES MANAGER

1.17.08
DATE

STD. NO.
W-8


SHEET 1 OF 2

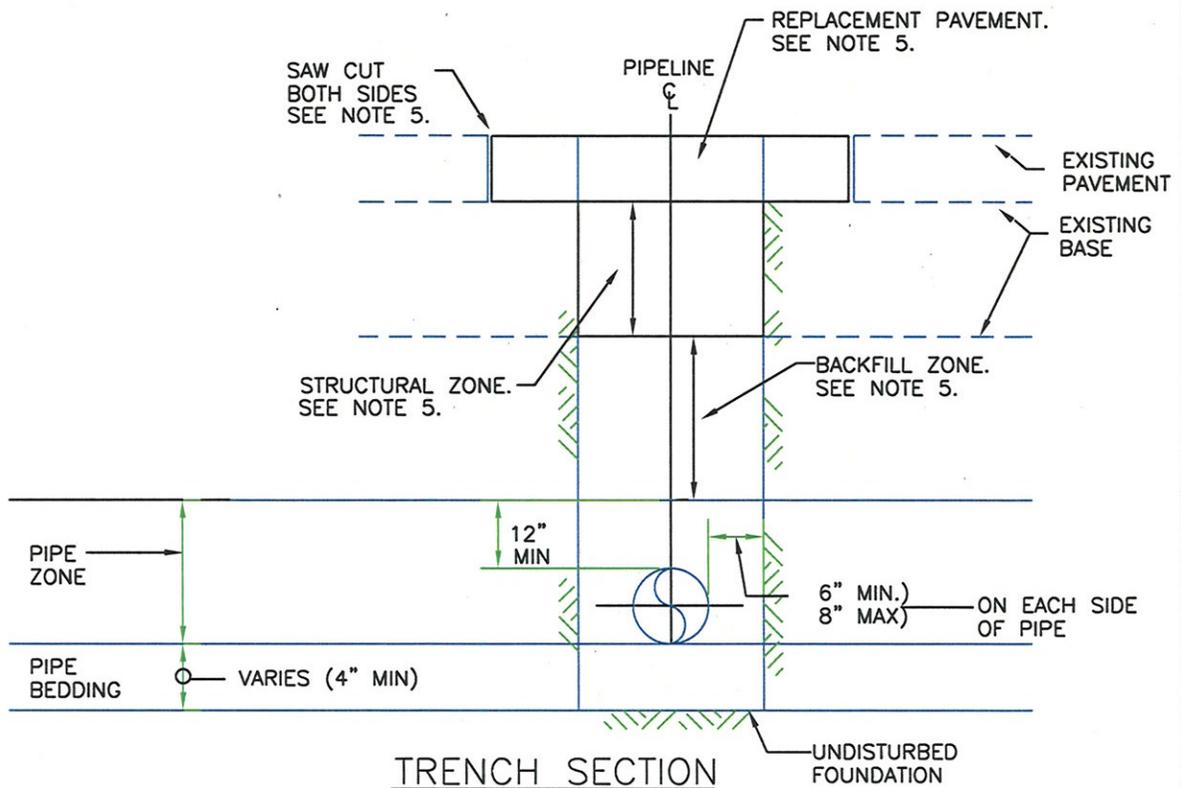

CONSTRUCTION NOTES

1. 95% MIN. RELATIVE COMPACTION SHALL BE REQUIRED IN THE STRUCTURAL ZONE AND 0.5' BELOW IT. 90% SHALL BE REQUIRED IN THE REMAINDER OF THE BACKFILL ZONE.
2. PRIOR TO PLACING BACKFILL, CALL CITY ENGINEERING DIVISION FOR STREET ZONE, INSPECTION.
3. ALL WORK SHALL BE IN ACCORDANCE WITH SPECIFICATION SECTION 02223 & 02220.
4. ALL BACKFILL WITHIN THE PIPE BASE AND PIPE ZONE SHALL BE IMPORTED SAND OR GRANULAR MATERIAL UNLESS NOTED OTHERWISE.
5. BACKFILL, BASE, & PAVEMENT REPAIR TO BE DONE PER THE "EXISTING STREET TRENCH DETAIL" OF THE GOVERNING CITY. PIPE, PIPE BEDDING & PIPE ZONE BACK FILL PER THIS DETAIL WHERE CONFLICT OCCURS WITH THE TRENCH DETAIL OF THE GOVERNING CITY.

STREET BACKFILL AND RESURFACING DETAIL

REVISIONS				CITY OF SAN JUAN CAPISTRANO		STD. NO.
NO.	DATE	APPROVED		JUAN CAPISTRANO		W-8
				APPROVED  WATER SERVICES MANAGER	1.15.08	
						SHEET 2 OF 2