

MASONRY PILASTER DETAIL




City of San Juan Capistrano
 Development Services Department
 32400 Paseo Adelanto
 San Juan Capistrano, CA 92675
 Phone: (949) 493-1171
 Fax: (949) 661-5451
<http://www.sanjuancapistrano.org/>

D-8:

- APPLICABLE BUILDING STANDARDS:**
1. 2013 California Residential Code (CRC)
 2. San Juan Capistrano Municipal Code (SJCMC)

Building permit is required for masonry pilasters more than 36" high measured from the top of the footing to the top of the pilaster. This information summarizes certain parts of the CBC and is not a replacement for any provisions required in the CBC. This handout is simply to make certain parts of the code more accessible and is subject to field conditions.

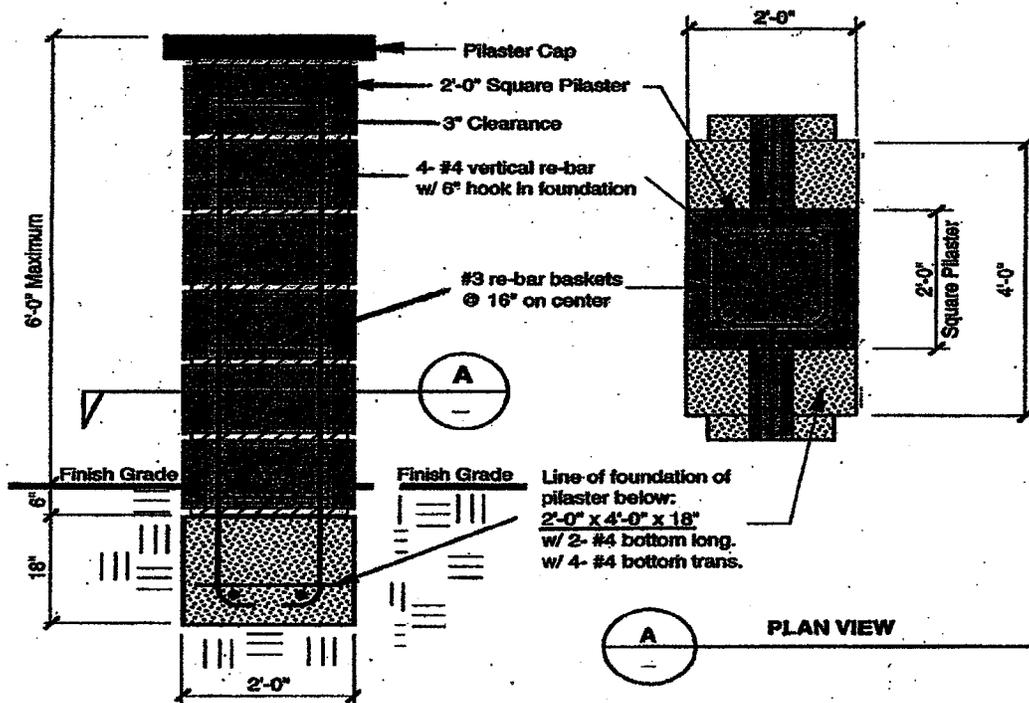

Notes:

- All cells shall be filled solid with grout and a special inspection is not required unless specified by civil engineer.
- Concrete design mixes shall be in accordance with Chapter 19 of the CBC and ACI 318.
- All reinforcing steel, anchor bolts, dowels and other inserts shall be secure in position and inspected by the City of San Juan Capistrano prior to pouring of any concrete.
- When grouting is stopped for one hour or longer, horizontal construction joints shall be formed by stopping the grout pour 1-1/2" below the top of the uppermost unit.

****This handout is simply to make certain parts of the code more accessible and should be used as a guideline****